



OWS | 30 to 100 L/min

Oil Water Separator

Coalescing plate oil removal


www.enviroconcept.com.au

OVERVIEW

Oil Water Separator with coalescing plates (6mm and 20mm pitch range) features a removable and uniquely designed cross flow non-plugging coalescing plate packs which maximise oil and grease removal (up to 95%).


SPECIFICATION

Flow Capacity	30L / 50L / 100L/min
Media	Coalescing Plate (6mm and 20mm pitch range)
Reduction	up to 95% Gasoline, Diesel, Lubricant, Grease

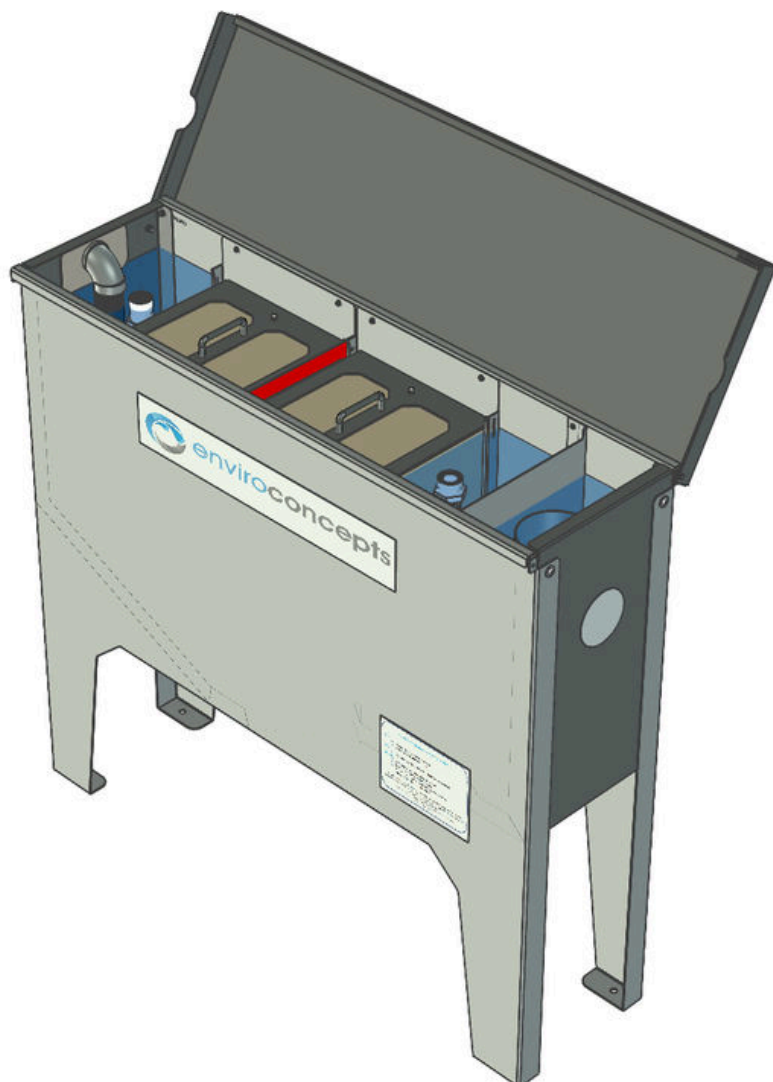

Turnkey Solution

- Above Ground
- Easy Operation and Maintenance



Used In

- Workshops
- Transport
- Mining
- Equipment Hire



Pre-Approved

- By Major Councils Across Australia



Mon – Fri: 7:30 – 16:00 | AEST

(07) 5535 9000

sales@enviroconcept.com.au

23 Motorway Cct, Ormeau QLD 4208

